



excellent corrosion resistance in a wide range of severe environments

Alloy C276 400 (40 mesh)


Free Area **36.8** **%**
 Wire Diameter **0.250** **mm**
 Nominal Aperture **385** **micron**

Weave Type **plain**

Weight, kg per m2 **1.33**

Typical Composition

Nickel **55% min**
 Chrome **15.5-16.5%**
 Molybdenum **15-17% max**
 Cobalt **2.50% max**
 Tungsten **3-4.5% max**
 Vanadium **0.35% max**

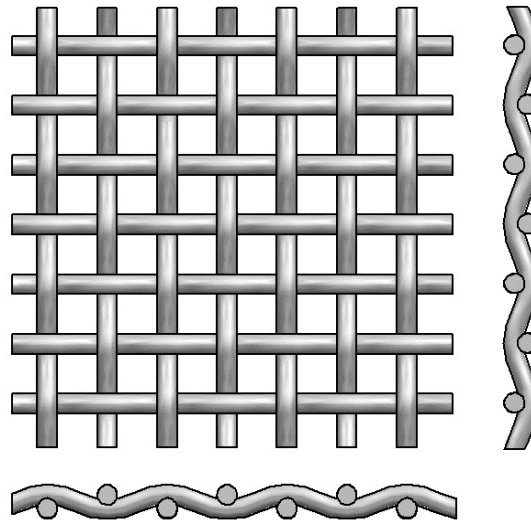

weave image

*Hastelloy is a trade name of Haynes International Inc.

Available Formats - please ask for options not listed below

- Rolls ✓ up to 1300 mm wide
- Pieces ✓
- Circles ✓
- Panels ✓
- Strips ✓

all information is provided in good faith - actual values may vary according to available stock and standard norms
 weights and measures are nominal values only

in accordance with the requirements of ISO 9044 latest issue

contact sales@unitedwire.com
 visit www.unitedwire.com
 call **(+44) (0)131 552 6241**

United Wire • Granton Park Avenue • Granton • Edinburgh • EH5 1HT • UK

Tel: +44 131 552 6241 · Email: info@unitedwire.com · Website: www.unitedwire.com

United Wire is a business operated by M-I Drilling Fluids U.K. Limited

Registered office: Peregrine House, Peregrine Road, Westhill Business Park, Westhill, Aberdeenshire, Scotland, AB32 6JL

Registered in Scotland No. 161934

